

# COMMERCIAL & INSTITUTIONAL CONSOLIDATED PRODUCT CATALOGUE

w.e.f Jan 2021





**RR Global** is a USD 850 Million conglomerate in the electrical sector with a presence in over 85 countries globally. RR Global has always endeavored to create products of the higher quality using the latest in innovative technology. Spread across multiple business verticals including Wires & Cables, Switches, Fans, Switchgears, Busducts, Automated Multilevel Car Parking systems and now Lighting through our newest acquisition – Arraystorm.

**Arraystorm** is a recent addition to the portfolio of Brands under RR Global. RR Kabel, a name admired worldwide in the electrical industry with presence in over 85 countries globally, made acquisition of Arraystorm – a leading specialised lighting solutions provider. Arraystorm – is a premium LED lighting brand known for its energy-efficient customised lighting solutions. Arraystorm reinforces RR Kabel’s philosophy of offering unique innovative products & solutions and widens the choice for the customer at the premium end.

**Arraystorm** focuses on the functional & professional LED lighting business. We create energy-efficient lighting products at our state-of-the-art factory in Bengaluru. Our aim is to deliver custom designed, high quality and high value lighting solutions to people and places worldwide. Our products are insight-driven and specially designed to suit each and every customer. We believe that our strong focus on technology and innovation will make the world a brighter place. To us the future is a challenge, the kind that we are ready to meet head-on, and we progress on a daily basis to become India’s most innovative LED lighting application brand.

At Arraystorm, we do not design products, we design outcomes. Our products and solutions are a result of our futuristic thinking so as to create energy efficient and sustainable products. We do not consider the development of new lighting technologies to be our final destination, instead, we believe in focusing on addressing daily lighting problems. This helps us constantly deliver innovative, exciting, and practical solutions, to address our customers’ needs.





# INDOOR COMMERCIAL LIGHTING RANGE

Lighting needs to be an important consideration in an indoor commercial environment. A complete lighting solution needs to provide visual comfort, so that they have a feeling of well-being and have the ability to perform tasks with a high degree of accuracy over a long period of time. This can be achieved by providing adequate illuminance on the work bays and surrounding areas



## Application areas

Commercial workplaces  
Educational institutions  
Healthcare



## EPIC I



### RECESSED 1X1 LED GRIDLIGHT

Arraystorm EPIC 1 Recessed High Efficiency 1X1 LED Gridlight, Body made of CRCA and Opal Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGL2001RFXXIN016	16	120	290   290	300   300   88	SMD

## EPIC I



### RECESSED 2X2 LED GRIDLIGHT

Arraystorm EPIC 1 Recessed High Efficiency 2X2 LED Gridlight, Body made of CRCA and Opal Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGL2002RFXXIN030	30	120	NA	595   595   88	SMD
ASGL2002RFXXIN035	35	120	NA	595   595   88	SMD
ASGL2002RFXXIN042	42	120	NA	595   595   88	SMD

## ASTRO



### RECESSED 2X2 LED GRIDLIGHT

Arraystorm ASTRO Recessed 2X2 LED Gridlight, Body made of ABS Plastic and Aluminium Gear tray, Opal Diffuser, homogeneous light distribution. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGL2011RFXXIN028	28	120	NA	595   595   88	SMD
ASGL2011RFXXIN032	32	120	NA	595   595   88	SMD
ASGL2011RFXXIN038	38	120	NA	595   595   88	SMD

## GENYSIS



### RECESSED | SURFACE 2X2 LED GRIDLIGHT

Arraystorm GENYSIS Recessed / Surface 2X2 LED Gridlight, Body made of ABS Plastic and Galvanised Gear tray, Opal Diffuser, homogeneous light distribution, 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGL2015RFXXIN030	30	120	NA	594   594   52	SMD
ASGL2015RFXXIN035	35	120	NA	594   594   52	SMD
ASGL2015RFXXIN042	42	120	NA	594   594   52	SMD

## EPITOME



### RECESSED 2X2 LED GRIDLIGHT

Arraystorm EPITOME Recessed High Efficiency 2X2 LED Gridlight, Body made of CRCA and Opal Diffuser with homogeneous light distribution without hotspots, 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGL2006RFXXIN030	30	120	NA	595   595   110	SMD
ASGL2006RFXXIN035	35	120	NA	595   595   110	SMD
ASGL2006RFXXIN042	42	120	NA	595   595   110	SMD



## EPIC II



### RECESSED 1X4 LED GRID LIGHT

Arraystorm EPIC II Recessed 1X4 Linear LED Grid light, Body made of CRCA and Opal Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGL4002RFXXIN030	30	120	NA	1195   295   88	SMD
ASGL4002RFXXIN035	35	120	NA	1195   295   88	SMD
ASGL4002RFXXIN042	42	120	NA	1195   295   88	SMD

## EPIC II



### RECESSED 2X4 LED GRID LIGHT

Arraystorm EPIC II Recessed High Efficiency 2X2 LED Grid light, Body made of CRCA and Opal Diffuser with homogeneous light distribution without hotspots, 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGL2004RFXXIN060	60	120	NA	1195   595   88	SMD
ASGL2004RFXXIN070	70	120	NA	1195   595   88	SMD
ASGL2004RFXXIN084	84	120	NA	1195   595   88	SMD

## LINEAGE TZ R



### RECESSED LED TECHZONE GRID LIGHT

Arraystorm LINEAGE TZ High Efficiency Recessed Techzone LED Grid light, Body made of Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL14558RFXXIN030	30	120	NA	1195   145   58	SMD
ASCL14558RFXXIN040	40	120	NA	2395   145   58	SMD
ASCL14558RFXXIN060	60	120	NA	2395   145   58	SMD





## SWANK DR



### DEEP RECESSED LED DOWN LIGHT

Arraystorm SWANK DR LED Deep Recessed High Efficiency Round Downlight, Body made of pressure diecast Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) dia	DIMENSION (mm) dia   H	LED
ASDL1012RFXXIN007	7	120	110	120   50	SMD
ASDL1012RFXXIN010	10	120	110	120   50	SMD
ASDL1013RFXXIN015	15	120	145	155   58	SMD
ASDL1013RFXXIN018	18	120	145	155   58	SMD
ASDL1014RFXXIN024	24	120	165	175   58	SMD

## SWANK R



### RECESSED LED DOWN LIGHT

Arraystorm SWANK R LED Recessed High Efficiency Round Downlight, Body made of Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots, 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) dia	DIMENSION (mm) dia   H	LED
ASDL1002RFXXIN007	7	120	108	114   44	SMD
ASDL1003RFXXIN010	10	120	136	142   44	SMD
ASDL1003RFXXIN015	15	120	136	142   44	SMD
ASDL1004RFXXIN018	18	120	194	200   44	SMD
ASDL1004RFXXIN024	24	120	194	200   44	SMD

## SWANK S



### SURFACE MOUNTED LED DOWN LIGHT

Arraystorm SWANK S Surface Mounted High Efficiency LED Round Downlight, Body made of Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) dia	DIMENSION (mm) dia   H	LED
ASDL1002SFXXIN007H120	7	120	NA	114   120	SMD
ASDL1003SFXXIN010H120	10	120	NA	142   120	SMD
ASDL1003SFXXIN010H190	10	120	NA	142   190	SMD
ASDL1003SFXXIN015H190	15	120	NA	142   190	SMD
ASDL1004SFXXIN018H190	18	120	NA	200   190	SMD
ASDL1004SFXXIN024H190	24	120	NA	200   190	SMD

\*\*Add additional cost of suspension wire for suspending Swank S series.

## SUSPENSION WIRES (To be ordered separately for suspended Swank S downlighters)



Arraystorm adjustable universal suspension wire, for suspending luminaries from true ceiling.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) H	LED
ASSUSKIT1.5M single				1500	NA
ASSUSKIT1.5M double				1500	NA
ASSUSKIT1.5M Y				1500	NA

## SWANK SQUARE DR



### DEEP RECESSED LED DOWN LIGHT

Arraystorm SWANK SQUARE DR High Efficiency LED Deep Recessed Square Downlight, Body made of pressure diecast Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASDL1005RFXXIN007	7	120	100   100	110   110   50	SMD
ASDL1005RFXXIN010	10	120	100   100	110   110   50	SMD
ASDL1006RFXXIN015	15	120	135   135	145   145   58	SMD
ASDL1006RFXXIN018	18	120	135   135	145   145   58	SMD
ASDL1007RFXXIN024	24	120	150   150	160   160   58	SMD



## LINEAGE R-65



### RECESSED LED CHANNEL LIGHT

Arraystorm LINEAGE R 6540 High Efficiency Recessed LED Channel, Body made of extruded Aluminium and PMMA Diffuser with homogeneous light distribution and without hotspots, 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL6540RFXXIN010	10	120	605   60	610   65   40	SMD
ASCL6540RFXXIN020	20	120	1203   60	1210   65   40	SMD
ASCL6540RFXXIN030	30	120	1203   60	1210   65   40	SMD
ASCL6540RFXXIN040	40	120	2393   60	2400   65   40	SMD
ASCL6540RFXXIN060	60	120	2393   60	2400   65   40	SMD

## LINEAGE R-88



### RECESSED LED CHANNEL LIGHT

Arraystorm LINEAGE R 8840 High Efficiency Recessed LED Channel, Body made of extruded Aluminium and PMMA Diffuser with homogeneous light distribution and without hotspots, 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL8840RFXXIN010	10	120	605   60	610   88   40	SMD
ASCL8840RFXXIN020	20	120	1203   60	1210   88   40	SMD
ASCL8840RFXXIN030	30	120	1203   60	1210   88   40	SMD
ASCL8840RFXXIN040	40	120	2393   60	2400   88   40	SMD
ASCL8840RFXXIN060	60	120	2393   60	2400   88   40	SMD

## LINEAGE S-50



### SUSPENDED LED CHANNEL LIGHT

Arraystorm LINEAGE S 5085 High Efficiency Suspended LED Channel, Body made of extruded Aluminium and PMMA Diffuser with homogeneous light distribution and without hotspots, 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL5085SFXXIN010	10	120	NA	600   50   85	SMD
ASCL5085SFXXIN020	20	120	NA	1195   50   85	SMD
ASCL5085SFXXIN030	30	120	NA	1195   50   85	SMD
ASCL5085SFXXIN040	40	120	NA	2385   50   85	SMD
ASCL5085SFXXIN060	60	120	NA	2385   50   85	SMD

## LINEAGE S-72



### SUSPENDED LED CHANNEL LIGHT

Arraystorm LINEAGE S 7285 High Efficiency Suspended LED Channel, Body made of extruded Aluminium and PMMA Diffuser with homogeneous light distribution and without hotspots, 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL7285SFXXIN015	15	120	NA	600   72   85	SMD
ASCL7285SFXXIN020	20	120	NA	1195   72   85	SMD
ASCL7285SFXXIN030	30	120	NA	1195   72   85	SMD
ASCL5085SFXXIN040	40	120	NA	2385   72   85	SMD
ASCL5085SFXXIN060	60	120	NA	2385   72   85	SMD

## FLUEDE



### SUSPENDED LED CHANNEL LIGHT

Arraystorm Fluede 9440 High Efficiency Suspended LED Channel, Body made of extruded Aluminium and PMMA Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL9440SFXXIN010	10	120	NA	656   97   40	SMD
ASCL9440SFXXIN020	20	120	NA	1245   97   40	SMD
ASCL9440SFXXIN040	40	120	NA	2408   97   40	SMD
ASCL9440SFXXIN060	60	120	NA	2408   97   40	SMD



## LINEAGE S TZ




### SUSPENDED LED TECH ZONE CHANNEL LIGHT

Arraystorm LINEAGE S TZ High Efficiency Suspended LED Channel, Body made of extruded Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL14558RFXXIN015	15	120	NA	600   145   58	SMD
ASCL14558RFXXIN030	30	120	NA	1195   145   58	SMD
ASCL14558RFXXIN040	40	120	NA	2395   145   58	SMD
ASCL14558RFXXIN060	60	120	NA	2395   145   58	SMD

## LINEAGE S-50 UD



### SUSPENDED LED UP DOWN CHANNEL LIGHT

Arraystorm LINEAGE S UD 5085 High Efficiency Suspended Updown LED Channel, Body made of extruded Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL5085SFXXIN09DN6UP	15	120	NA	600   50   85	SMD
ASCL5085SFXXIN020DN10UP	30	120	NA	1195   50   85	SMD
ASCL5085SFXXIN042DN18UP	60	120	NA	2385   50   85	SMD
ASCL5085SFXXIN060DN24UP	84	120	NA	2385   50   85	SMD

## LINEAGE S - 72 UD



### SUSPENDED LED UP DOWN CHANNEL LIGHT

Arraystorm LINEAGE S UD 7285 is High Efficiency Suspended Updown LED Channel, Body made of extruded Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL7285SFXXIN014DN6UP	20	120	NA	600   72   85	SMD
ASCL7285SFXXIN028DN12UP	40	120	NA	1195   72   85	SMD
ASCL7285SFXXIN042DN18UP	60	120	NA	2385   72   85	SMD
ASCL7285SFXXIN060DN24UP	84	120	NA	2385   72   85	SMD

## LINEAGE S TZUD



### SUSPENDED LED CHANNEL LIGHT

Arraystorm LINEAGE S UD 14558 High Efficiency Suspended Updown LED Channel, Body made of extruded Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL14558SFXXIN028DN12UP	40	120	NA	1195   145   58	SMD
ASCL14558SFXXIN060DN24UP	84	120	NA	2395   145   58	SMD

## LINEAGE R / S WALL WASHER



### RECESSED & SUSPENDED WALL WASHER LED CHANNEL LIGHT

Arraystorm LINEAGE R 7227 High Efficiency Recessed LED Wall Washer, Body made of extruded Aluminium and Wall Washer Lens. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASWW7227RFXXIN030	30	120	NA	1200   72   27	SMD
ASWW7575SFXXIN030	30	120	NA	1200   75   75	SMD





## LINEAGE S - LOUVER




### SUSPENDED LED CHANNEL LIGHT WITH DARK OPTICS WITH ALUMINIUM LOUVERS

Arraystorm LINEAGE S 5275 High Efficiency Suspended LED Channel, Body made of extruded Aluminium and Aluminium Louvers. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL5275SFXXIN030LOU	30	120	NA	1200   52   75	SMD
ASCL5275SFXXIN060LOU	60	120	NA	2400   52   75	SMD

## LINEAGE S - HONEYCOMB



### SUSPENDED LED CHANNEL LIGHT WITH DARK OPTICS WITH HONEYCOMB LOUVERS

Arraystorm LINEAGE S 5275 High Efficiency Suspended LED Channel, Body made of extruded Aluminium and Honeycomb Louvers. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL5275SFXXIN030HC	30	120	NA	1200   52   75	SMD
ASCL5275SFXXIN060HC	60	120	NA	2400   52   75	SMD

## LINEAGE S - DARK OPTICS



### SUSPENDED LED CHANNEL LIGHT WITH DARK OPTICS

Arraystorm LINEAGE S 2250 High Efficiency Suspended LED Channel, Body made of extruded Aluminium and Spot Reflectors. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL2250SFXXIN030DO	30	15 30 55	NA	1200   22   50	SMD
ASCL3377SFXXIN030DO	30	15 30 55	NA	1200   33   77	SMD
ASCL4477SFXXIN030DO	30	15 30 55	NA	1200   44   77	SMD

## FABIA UD



### SUSPENDED LED ARCHITECTURAL LIGHT

Arraystorm FABIA High Efficiency Architectural Updown LED Suspended Luminaire, Body made of high grade extruded Aluminium in Matt White powder coated and extremely smooth homogeneous light across the transparent acrylic diffuser without hot spots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASAR0301SFXXIN040UPDN	40	120	NA	1198   220   8	SMD
ASAR0301SFXXIN080UPDN	80	120	NA	2396   220   8	SMD

## FABIA DN



### SUSPENDED LED ARCHITECTURAL LIGHT

Arraystorm FABIA High Efficiency Architectural LED Suspended Channel, Body made of high grade extruded Aluminium in Matt White powder coated and extremely smooth homogeneous light across the transparent acrylic diffuser without hot spots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASAR0302SFXXIN040	40	120	NA	1198   220   8	SMD
ASAR0302SFXXIN080	80	120	NA	2396   220   8	SMD



## FLO



### SUSPENDED LED CHANNEL LIGHT

Arraystorm FLO, Tubular Architectural Circular LED Linear Suspended Channel, Body made of extruded Aluminium and PMMA Diffuser with smooth homogeneous and gentle ceiling illumination with 340° light emission  
230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) H   dia	LED
ASD035SFIXXIN020	20	120	NA	1195   35	SMD
ASD035SFIXXIN040	40	120	NA	2395   35	SMD
ASD050SFIXXIN020	20	120	NA	1195   50	SMD
ASD050SFIXXIN040	40	120	NA	2395   50	SMD
ASD070SFIXXIN030	30	120	NA	1195   70	SMD
ASD070SFIXXIN060	60	120	NA	2395   70	SMD
ASD120SFIXXIN030	30	120	NA	1195   120	SMD
ASD120SFIXXIN060	60	120	NA	2395   120	SMD

## BARNEY



### SUSPENDED LED ARCHITECTURAL PENDANT LIGHT

Arraystorm Barney is Suspended LED Architectural pendant Light, Body made of high- grade extruded Aluminium available in Matt White,Red, Black, Orange & Antique copper color, with PMMA diffuser for bright & homogeneous light.  
230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) H   dia	LED
ASPN0401SFXXIN030	30	120	NA	400   210	SMD

#### COLOUR OPTION



## BARNEY DOME



### SUSPENDED LED ARCHITECTURAL PENDANT LIGHT

Arraystorm Barney Dome is Suspended LED Architectural pendant Light, Body made of high- grade extruded Aluminium, with PMMA diffuser for bright & homogeneous light. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) H   dia	LED
ASPN0501SFXXIN035	35	120	NA	500   334	SMD






# FORMS

# RANGE

Many centuries ago, geometry won us over with its precise lines, enchanting forms, and captivating symmetry. The same striking patterns and flows define a design language that is modern, minimal, and contemporary, yet completely timeless. Arraystorm Forms are an exploration of geometric shapes in designer lighting. Artfully composed, and technologically sound, they are designed to delight, both, in form as well as function.

Geometry inspires the signature design elements of this range, which encompasses elegant trapezoids, stylish triangles, and softly-glowing hexagons. Arraystorm Forms capture your imagination, and lend workspaces and meeting areas a sophisticated, compelling quality. For architects, and designers, it's a new dimension in lighting.





## ARIUM II



### SUSPENDED LED DRUM LIGHT

Arraystorm Arium 2, Hi-efficiency Suspended LED Drum Luminaire made of High - grade extruded Aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) dia   H	LED
ASAR8011SFXXIN030	30	120	NA	450   60	SMD
ASAR8012SFXXIN040	40	120	NA	600   60	SMD
ASAR8013SFXXIN060	60	120	NA	750   60	SMD
ASAR8014SFXXIN080	80	120	NA	900   60	SMD

## ARIUM III



### SUSPENDED LED DRUM LIGHT UP DOWN

Arraystorm Arium 3, Hi-efficiency Suspended LED up-down Drum Luminaire made of High - grade extruded Aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) dia   H	LED
ASAR8011SFXXIN020DN10UP	30	120	NA	450   60	SMD
ASAR8012SFXXIN028DN12UP	40	120	NA	600   60	SMD
ASAR8013SFXXIN042DN18UP	60	120	NA	750   60	SMD
ASAR8014SFXXIN042DN18UP	60	120	NA	900   60	SMD

## ARIUM IV



### SUSPENDED LED DRUM LIGHT

Arraystorm Arium 4, Hi-efficiency Recessed LED Drum Luminaire made of High - grade extruded Aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) dia   H	LED
ASAR8011RFXXIN030	30	120	390	450   60	SMD
ASAR8012RFXXIN040	40	120	590	600   60	SMD

## ORBIZ



### SUSPENDED LED RING LIGHT

Arraystorm Orbiz, Hi-efficiency Suspended LED Ring Luminaire made of high-grade extruded Aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) dia   H	LED
ASCRD600SFXXIN040	40	120	NA	600   60	SMD
ASCRD750SFXXIN060	60	120	NA	750   60	SMD
ASCRD900SFXXIN080	80	120	NA	900   60	SMD



## TRIA



### SUSPENDED LED TRIANGLE LIGHT

Arraystorm Tria, Hi-efficiency Suspended LED Triangle Luminaire made of high-grade extruded aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) SIZE   H	LED
ASAR9301SFXXIN030	30	120	NA	450   450   450   60	SMD
ASAR9301SFXXIN040	40	120	NA	300   600   600   60	SMD

## RHOMBIC



### SUSPENDED LED RHOMBUS LIGHT

Arraystorm Rhombic, Hi-efficiency Suspended LED Rhombus Luminaire made of high-grade extruded aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) SIZE   H	LED
ASAR9401SFXXIN030	30	120	NA	300   300   60	SMD

## HEXOID



### SUSPENDED LED HEXAGON LIGHT

Arraystorm Hexoid, Hi-efficiency Suspended LED Hexagon Luminaire made of high-grade extruded aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) SIZE   H	LED
ASAR9101SFXXIN040	40	120	NA	300 each   60	SMD
ASAR9102SFXXIN080	80	120	NA	600 each   60	SMD

## HEXOID RING



### SUSPENDED LED HEXAGON RING LIGHT

Arraystorm Hexoid-Ring, Hi-efficiency Suspended LED Hexagon Ring Luminaire made of high-grade extruded aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) SIZE   H	LED
ASAR9201SFXXIN040	40	120	NA	300 each   60	SMD
ASAR9202SFXXIN080	80	120	NA	600 each   60	SMD

## TRAPEZOID



### SUSPENDED LED TRAPEZIUM LIGHT

Arraystorm Trapezoid, Hi-efficiency Suspended LED Trapezium Luminaire made of high-grade aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) SIZE   H	LED
ASGL4006SFXXIN030	30	120	NA	1192   395 X 195   60	SMD



## SABER



### LED BATTEN LIGHT

Arraystorm SABER LED Batten, Body and Diffuser made of Polycarbonate. CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASBT9001SFXXIN010	10	120	NA	600   25   40	SMD
ASBT9001SFXXIN020	20	120	NA	1200   25   40	SMD

## SABER



### LED BATTEN LIGHT

Arraystorm SABER LED Batten, Body made of Aluminium and Acrylic Diffuser. CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASBT9002SFXXIN010	10	120	NA	600   25   40	SMD
ASBT9002SFXXIN020	20	120	NA	1200   25   40	SMD

## SABER



### LED BATTEN LIGHT

Arraystorm SABER LED Batten, Body made of Aluminium and Acrylic Diffuser. CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASBT9004SFXXIN020	20	120	NA	600   35   50	SMD
ASBT9004SFXXIN040	40	120	NA	1200   35   50	SMD

## BANDSTORM (IP20)



### LED STRIP LIGHT

Arraystorm BANDSTORM is Decorative LED IP 20 Striplight The LED striplight gives a smoothing effect. 5m/Spool, 230 V with standard driver,

CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASSR7001SFXXIN005	4.8	120	NA	NA	SMD
ASSR7002SFXXIN010	9.6	120	NA	NA	SMD
ASSR7003SFXXIN015	14.4	120	NA	NA	SMD

\*\*Add additional cost for constant voltage drivers depending upon length of strip light.

## BANDSTORM (IP65)



### LED STRIP LIGHT

Arraystorm BANDSTORM is Decorative LED IP 65 Striplight The LED striplight gives a smoothing effect. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASSR7011SFXXIN005	4.8	120	NA	NA	SMD
ASSR7012SFXXIN010	14.4	120	NA	NA	SMD
ASSR7013SFXXIN015	14.4	120	NA	NA	SMD

\*\*Add additional cost for constant voltage drivers depending upon length of strip light.



## BANDSTORM DRIVER




### STRIP LIGHT DRIVER

Arraystorm Bandstorm IP 20 constant voltage Driver.

PRODUCT CODE	WATT W	DIMENSION (mm) L   W   H	LED
ASDRISTR20W12V1.7A	20	78   46   33	NA
ASDRISTR30W12V2.5A	30	115   52   36	NA
ASDRISTR48W12V4A	48	115   52   36	NA
ASDRISTR72W12V6A	72	140   76   45	NA

## ALUMINIUM SECTIONS



### STRIP LIGHT ALUMINIUM SECTIONS

Arraystorm BANDSTORM casing is a IP 20 anodised aluminium surface mounted casing for enclosing LED Bandstorm striplight.

PRODUCT CODE	DIMENSION (mm) L   W   H	LED
ASCL1606SF	1000   16   06	NA
ASCL1612SF	1000   16   12	NA
ASCL2206RF	1000   22   06	NA
ASCL2212RF	1000   22   12	NA





# RETAIL LIGHTING RANGE

Accent lighting for retail stores can help highlight certain parts of a retail store or provide a specific mood. LED lights in particular make excellent accent lamps with their longevity and color options. LED lighting offers energy efficient lighting solutions with a variety of options that can save money for retailers and maximize customer satisfaction with an enhanced shopping experience.



## Application areas

Hospitality

Retail shops

Commercial indoor spaces





## METEOR I



### RECESSED FIXED LED SPOT LIGHT

Arraystorm METEOR 1 is Recessed Fixed LED Spotlight, Body made of high grade die-cast Aluminium. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) dia	DIMENSION (mm) dia   H	LED
ASSL3000RFXXIN003BXX	3	12 24 36	52	52   88	COB
ASSL3001RFXXIN007BXX	7	12 24 36	65	69   70	COB
ASSL3002RFXXIN012BXX	12	24 36 48	75	83   74	COB
ASSL3003RFXXIN018BXX	18	24 36 60	90	95   90	COB
ASSL3003RFXXIN024BXX	24	24 36 60	90	95   90	COB
ASSL3003RFXXIN030BXX	30	24 36 60	90	95   90	COB
ASSL3003RFXXIN042BXX	42	24 36 60	90	95   90	COB

## METEOR II




### RECESSED MOVABLE LED SPOT LIGHT

Arraystorm METEOR 2 is Recessed adjustable LED Spotlight, Body made of high grade di-cast Aluminium. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) dia	DIMENSION (mm) dia   H	LED
ASSL3011RMXXIN007BXX	7	24 36 48	86	102   58	COB
ASSL3012RMXXIN012BXX	12	24 36 48	86	102   68	COB
ASSL3013RMXXIN018BXX	18	24 36 60	110	125   80	COB
ASSL3013RMXXIN024BXX	24	24 36 60	110	125   80	COB
ASSL3014RMXXIN030BXX	30	24 36 60	132	148   82	COB
ASSL3015RMXXIN042BXX	42	24 36 60	154	170   82	COB

## METEOR III



### RECESSED FIXED LED SPOT LIGHT

Arraystorm METEOR 3 Recessed Fixed LED Spotlight with Dark Optics, Body made of Aluminium high grade di-cast Aluminium. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) dia	DIMENSION (mm) dia   H	LED
ASSL3021RFXXIN006BXX	7	24 36 60	65	70   70	COB
ASSL3022RFXXIN012BXX	12	24 36 48	70	83   80	COB
ASSL3023RFXXIN018BXX	18	24 36 60	90	100   95	COB
ASSL3023RFXXIN024BXX	24	24 36 60	90	100   95	COB
ASSL3024RFXXIN030BXX	30	24 36 60	90	100   95	COB

#### REFLECTOR COLOUR OPTION



## METEOR IV



### TRIMLESS RECESSED FIXED LED SPOT LIGHT

Arraystorm METEOR 4 Trimless Recessed Fixed LED Spotlight, Body made of Aluminium high grade di-cast Aluminium. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) dia	DIMENSION (mm) dia   H	LED
ASSL3031RFXXIN007BXX	7	24 36 60	62	60   71	COB
ASSL3032RMXXIN012BXX	12	24 36 60	90	82   100	COB
ASSL3033RFXXIN018BXX	18	24 36 60	100	98   114	COB

#### REFLECTOR COLOUR OPTION



## METEOR V



### SUSPENDED FIXED LED CYLINDRICAL SPOT LIGHT

Arraystorm METEOR 5 is Surfaced/Suspended Fixed LED Cylindrical Spotlight, Body made of high grade extruded aluminium. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) dia	DIMENSION (mm) dia   H	LED
ASSL3041SFXXIN007BXX	7	24 36 60	NA	50   165	COB
ASSL3042SFXXIN018BXX	18	24 36 60	NA	70   165	COB
ASSL3043SFXXIN030BXX	30	24 36 60	NA	100   165	COB



## METEOR ZOOM



### RECESSED FIXED LED SQUARE SPOT LIGHT

Arraystorm METEOR 5 Recessed LED Zoom Spotlight, Body made of high grade di-cast Aluminium. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASZM3062RMXXIN010BXX	12	24 36 48	85	94   72	COB
ASZM3063RMXXIN020BXX	20	24 36 60	120	130   165	COB
ASZM3064RMXXIN030BXX	30	24 36 60	140	148   121	COB
ASZM3065RMXXIN042BXX	42	24 36 60	170	180   147	COB

## OMNISENSE I



### LED TRACK LIGHT

Arraystorm OMNISENSE 1 high power LED Tracklight, Body made of Aluminium and Anodised Reflector and driver housed in plastic enclosure. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) dia	DIMENSION (mm) dia   H	LED
ASTR1101TMXXIN007BXX	7	24 36 48	NA	60   100	COB
ASTR1102TMXXIN012BXX	12	24 36 48	NA	80   120	COB
ASTR1103TMXXIN018BXX	18	24 36 60	NA	80   120	COB
ASTR1104TMXXIN030BXX	30	24 36 60	NA	180   147	COB

## OMNISENSE II



### LED TRACK LIGHT

Arraystorm OMNISENSE 2 high power LED Tracklight, Body made of Aluminium and Anodised aluminium reflector and driver housing in Die Cast enclosure. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASTR1112TMXXIN012BXX	12	24 36 48	NA	73   184	COB
ASTR1113TMXXIN020BXX	20	24 36 60	NA	93   189	COB
ASTR1114TMXXIN030BXX	30	24 36 60	NA	103   194	COB

## OMNISENSE TRACK



### TRACK FOR LED SPOT LIGHT

Arraystorm OMNISENSE Track, Body made of high grade extruded Aluminium.

PRODUCT CODE	DESCRIPTION	LED
ASTL1122SMRAIL-1MTR	2 wire track for phase/neutral, 1 phase 240 V	NA
ASTL1123SMRAIL-1MTR	3 wire track for phase/neutral/earth, 1 phase 240 V	NA
ASTL1124SMRAIL-1MTR	4 wire track for, 3 phase 240 V or 1 phase with dimming	NA
ASTL1126SMRAIL-1MTR	6 wire track for phase/neutral/earth, 2 dimming, 3 phase 240 V	NA

\*\*Add additional cost for straight | L | T | X connectors accessories and suspension system. Price available on request

## SUSPENSION WIRES (To be ordered separately for suspended Swank S downlighters)




Arraystorm adjustable universal suspension wire, for suspending luminaries from true ceiling.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) H	LED
ASSUSKIT1.5M double				1500	NA



## VANTAGE 10



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimbal spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGM9001RMXXIN012BXX	12	24 36 48	92 92	100   100   89	COB

## VANTAGE 2X10



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimball spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGM9002RMXXIN024BXX	24	24 36 60	92 192	100   200   89	COB

## VANTAGE 3X10




### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimball spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGM9003RMXXIN036BXX	36	24 36 60	92 272	100   280   89	COB

## VANTAGE 20



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimbal spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGM9004RMXXIN020BXX	20	24 36 60	109 109	126   126   104	COB

## VANTAGE 2X20



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimball spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGM9005RMXXIN040BXX	40	24 36 60	109 228	126   245   104	COB



## VANTAGE 3X20




### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimball spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGM9006RMXXIN060BXX	60	24 36 60	109 351	126   365   104	COB

## VANTAGE 30



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimball spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGM9007RMXXIN030BXX	30	24 36 60	160 160	175   175   115	COB

## VANTAGE 2X30



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimball spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGM9008RMXXIN060BXX	60	24 36 60	160 225	175   350   115	COB

## VANTAGE 3X30



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimball spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGM9009RMXXIN090BXX	90	24 36 60	160 485	175   500   115	COB

## VANTAGE ZOOM 10



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Recessed LED Gimball spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGZ9051RMXXIN012BXX	12	24 36 48	100 100	114   114   72	COB



## VANTAGE ZOOM 2X10



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Zoom is a Recessed LED Gimball Zoom spotlight, Body made of Aluminium and Anodised Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGZ9052RMXXIN024BXX	24	24 36 60	220 100	232   114   72	COB

## VANTAGE ZOOM 3X10



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Zoom is a Recessed LED Gimball Zoom spotlight, Body made of Aluminium and Anodised Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGZ9053RMXXIN036BXX	36	24 36 60	335 100	346   114   72	COB

## VANTAGE ZOOM 20



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Recessed LED Gimball spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGZ9054RMXXIN020BXX	20	24 36 60	130 130	137   137   102	COB

## VANTAGE ZOOM 2X20



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Zoom is a Recessed LED Gimball Zoom spotlight, Body made of Aluminium and Anodised Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGZ9055RMXXIN040BXX	40	24 36 60	265 130	278   137   102	COB

## VANTAGE ZOOM 3X20



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Zoom is a Recessed LED Gimball Zoom spotlight, Body made of Aluminium and Anodised Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGZ9056RMXXIN060BXX	60	24 36 60	405 130	418   137   102	COB

RESIDENTIAL



WORKSPACE



HEALTHCARE



RETAIL

Exclusive Partnership With



Experience the Sky



## EXPERIENCE THE SUN & SKY 'WHEREVER AND WHENEVER' YOU WANT?

Product Cat No	Luminaire Dimensions	Blue Sky Size	Weight
Arraystorm CoeLux 45 HC (270 W)	3761 x 2274 x h968 mm	870 x 1724 mm	330 KG
Arraystorm CoeLux 60 HC (270 W)	2892 x 2859 x 1556 mm	773 x 1884 mm	350 KG
Arraystorm CoeLux LS MATTE (90 W)	1200 x 600 x h465 mm	1086 x 295	30 KG

\*\* Prices will be available on request



## VANTAGE ZOOM 30



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Recessed LED Gimball spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGZ9057RMXXIN030BXX	30	24 36 60	155 155	163   163   120	COB

## VANTAGE ZOOM 2X30



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Zoom is a Recessed LED Gimball Zoom spotlight, Body made of Aluminium and Anodised Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGZ9058RMXXIN060BXX	60	24 36 60	320 155	330   163   120	COB

## VANTAGE ZOOM 3X30



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Zoom is a Recessed LED Gimball Zoom spotlight, Body made of Aluminium and Anodised Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASGZ9059RMXXIN090BXX	90	24 36 60	480 155	495   163   120	COB


## METEOR SQUARE





### RECESSED FIXED LED SQUARE SPOT LIGHT

Arraystorm METEOR SQUARE is Recessed Fixed LED Square Spotlight, Body made of high grade di-cast Aluminium 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASSL3051RFXXIN002BXX	2	15 30 55	37 37	40   45   49	COB
ASSL3052RFXXIN006BXX	6	15 30 55	68 37	75   45   49	COB
ASSL3053RFXXIN010BXX	10	15 30 55	140 37	147   45   49	COB
ASSL3054RFXXIN018BXX	18	15 30 55	273 37	280   45   49	COB
ASSL3055RFXXIN030BXX	30	15 30 55	405 37	415   45   49	COB





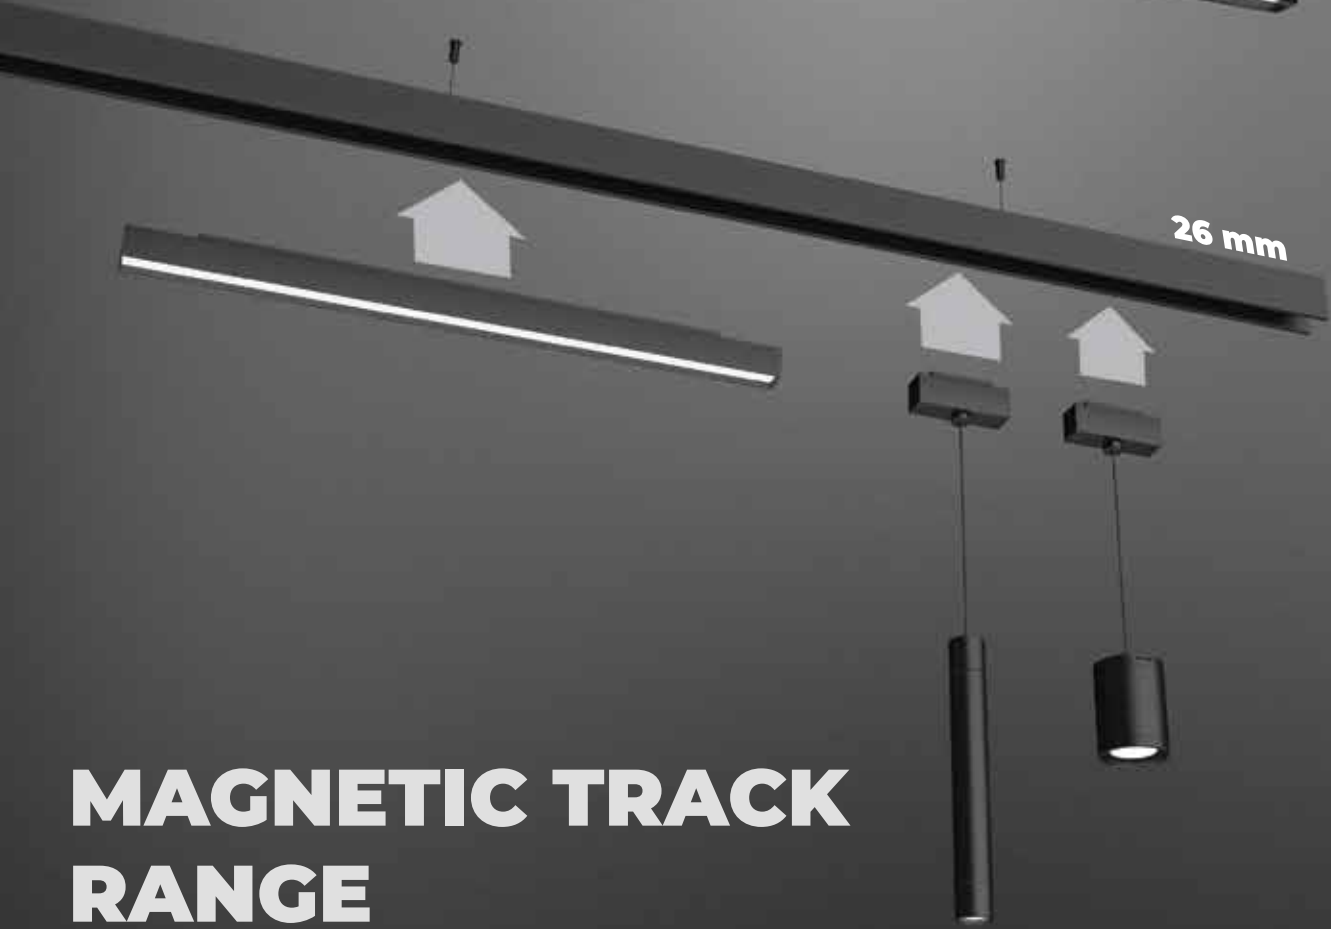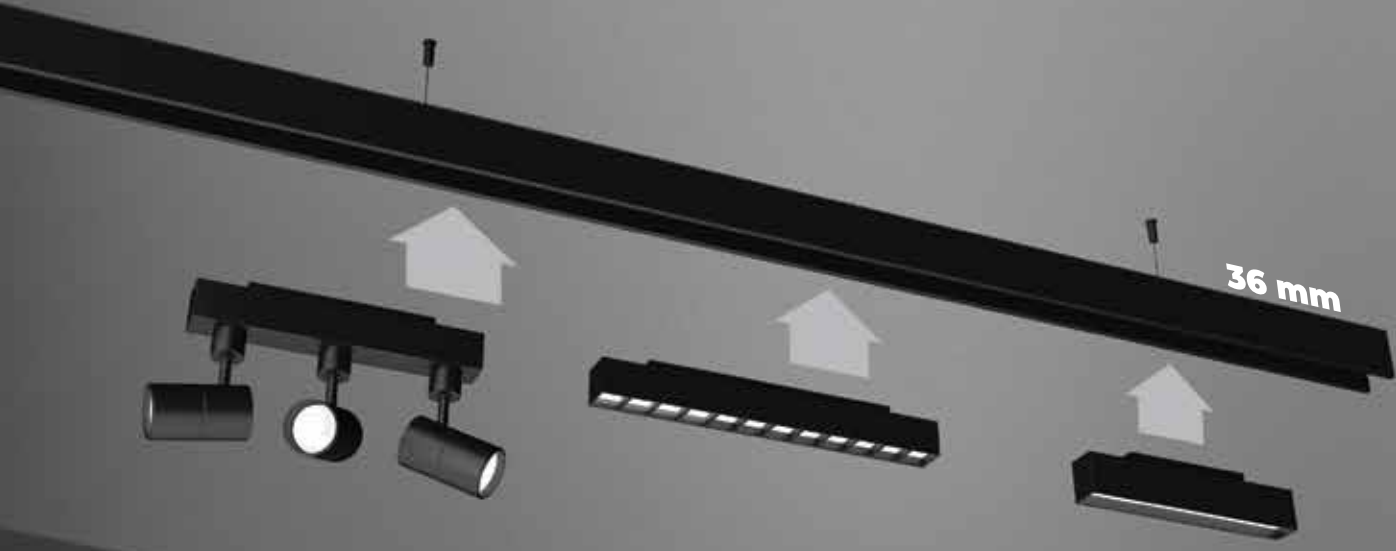

# MAGNETIC TRACK RANGE

\*\* Prices will be available on request



# INDUSTRIAL LIGHTING RANGE

An advanced lighting solution helps to optimize conditions at workstations in manufacturing bays, thereby increasing motivation and thus preventing fatigue and industrial accidents. Energy requirements in industrial complexes are often extremely high, due to the long operating and production hours, and hence require an energy efficient lighting solution.



## Application areas

**Industrial workplaces**  
**Warehouses**  
**Pharmaceuticals**



## BAYSTORM I



### SUSPENDED LED COB HIGHBAY LIGHT

Arraystorm COB BAYSTORM-1, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASHB0901PFXXIN40BXX	40	60 90	NA	180   180   340	COB
ASHB0901PFXXIN50BXX	50	60 90	NA	180   180   340	COB

## BAYSTORM II



### SUSPENDED LED COB HIGHBAY LIGHT

Arraystorm COB BAYSTORM-2, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASHB0902PFXXIN80BXX	80	60 90	NA	180   365   200	COB
ASHB0902PFXXIN100BXX	100	60 90	NA	180   365   200	COB

## BAYSTORM III



### SUSPENDED LED COB HIGHBAY LIGHT

Arraystorm COB BAYSTORM-3, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASHB0903PFXXIN120BXX	120	60 90	NA	412   412   340	COB
ASHB0903PFXXIN150BXX	150	60 90	NA	412   412   340	COB

## BAYSTORM IV



### SUSPENDED LED COB HIGHBAY LIGHT

Arraystorm COB BAYSTORM-4, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASHB0904PFXXIN160BXX	160	60 90	NA	385   385   200	COB
ASHB0904PFXXIN200BXX	200	60 90	NA	385   385   200	COB

## BAYSTORM VI



### SUSPENDED LED COB HIGHBAY LIGHT

Arraystorm COB BAYSTORM-6, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics with beam angles 60° / 90°. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASHB0906PFXXIN240BXX	240	60 90	NA	385   570   200	COB
ASHB0906PFXXIN300BXX	300	60 90	NA	385   570   200	COB



## SMD BAYSTORM II



### SUSPENDED LED SMD HIGHBAY LIGHT

Arraystorm SMD BAYSTORM 2, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) dia   H	LED
ASHB0911PFXXIN80BXX	80	90	NA	310   160	SMD
ASHB0911PFXXIN100BXX	100	90	NA	310   160	SMD

## SMD BAYSTORM III



### SUSPENDED LED SMD HIGHBAY LIGHT

Arraystorm SMD BAYSTORM-3, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics with beam angles 60° / 90°. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) dia   H	LED
ASHB0912PFXXIN120BXX	120	90	NA	357   165	SMD
ASHB0912PFXXIN150BXX	150	90	NA	357   165	SMD

## SMD BAYSTORM IV



### SUSPENDED LED SMD HIGHBAY LIGHT

Arraystorm SMD BAYSTORM-4, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics with beam angles 60° / 90°. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) dia   H	LED
ASHB0913PFXXIN180BXX	180	90	NA	407   165	SMD
ASHB0913PFXXIN200BXX	200	90	NA	407   165	SMD

## BAYSTORM LINEAR



### SUSPENDED LED LINEAR HIGHBAY LIGHT

Arraystorm Linear Baystorm 1, Hi-efficiency LED Linear Highbay Luminaire, Body made of extruded aluminium and hi-precision optics. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASHB0921PFXXIN30BXX	30	60 90 120	NA	310   95   90	SMD
ASHB0921PFXXIN50BXX	50	60 90 120	NA	510   95   90	SMD
ASHB0921PFXXIN100BXX	100	60 90 120	NA	1010   95   90	SMD
ASHB0922PFXXIN200BXX	200	60 90 120	NA	1010   95   90	SMD
ASHB0923PFXXIN300BXX	300	60 90 120	NA	1010   95   90	SMD

\*\*Available with clear and diffused cover option.



## FLOODSTORM I



### LED COB FLOOD LIGHT

Arraystorm COB FLOODSTORM-1, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0901PMXXOD040BXX	40	60 90	NA	180   180   340	COB
ASFL0901PMXXOD050BXX	50	60 90	NA	180   180   340	COB

## FLOODSTORM II



### LED COB FLOOD LIGHT

Arraystorm COB FLOODSTORM-2, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0902PMXXOD080BXX	80	60 90	NA	180   365   200	COB
ASFL0902PMXXOD100BXX	100	60 90	NA	180   365   200	COB

## FLOODSTORM III



### LED COB FLOOD LIGHT

Arraystorm COB FLOODSTORM-3, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0903PMXXOD0120BXX	120	60 90	NA	412   412   340	COB
ASFL0903PMXXOD0150BXX	150	60 90	NA	412   412   340	COB

## FLOODSTORM IV



### LED COB FLOOD LIGHT

Arraystorm COB FLOODSTORM-4, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0904PMXXOD0160BXX	160	60 90	NA	385   385   200	COB
ASFL0904PMXXOD0200BXX	200	60 90	NA	385   385   200	COB

## FLOODSTORM VI



### SUSPENDED LED COB FLOOD LIGHT

Arraystorm COB FLOODSTORM-6, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0906PMXXOD0240BXX	240	60 90	NA	385   385   200	COB
ASFL0906PMXXOD0300BXX	300	60 90	NA	385   385   200	COB



## SMD FLOODSTORM I



### LED SMD FLOOD LIGHT

Arraystorm SMD FLOODSTORM-1, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0701PMXXOD010	10	120	NA	90   70   24	SMD
ASFL0702PMXXOD020	20	120	NA	145   120   40	SMD
ASFL0703PMXXOD030	30	120	NA	145   120   40	SMD

## SMD FLOODSTORM II



### LED SMD FLOOD LIGHT

Arraystorm SMD FLOODSTORM-2, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium, with or without lens 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0704PMXXOD050	50	120	NA	230   195   58	SMD
ASFL0704PMXXOD050B120	50	120	NA	230   195   58	SMD

## SMD FLOODSTORM III



### LED SMD FLOOD LIGHT

Arraystorm SMD FLOODSTORM-3, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium with or without lens. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0705PMXXOD080	80	120	NA	295   250   60	SMD
ASFL0705PMXXOD080B120	80	120	NA	295   250   60	SMD
ASFL0705PMXXOD100	100	120	NA	295   250   60	SMD
ASFL0705PMXXOD100B120	100	120	NA	295   250   60	SMD

## SMD FLOODSTORM IV



### LED COB FLOOD LIGHT

Arraystorm COB FLOODSTORM-6, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium with or without lens. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0706PMXXOD120	120	120	NA	355   290   62	SMD
ASFL0706PMXXOD120B120	120	120	NA	355   290   62	SMD
ASFL0706PMXXOD150	150	120	NA	355   290   62	SMD
ASFL0706PMXXOD150B120	150	120	NA	355   290   62	SMD

## SMD FLOODSTORM V



### LED SMD FLOOD LIGHT

Arraystorm SMD FLOODSTORM-5, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium with or without lens 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0707PMXXOD180	180	120	NA	425   325   65	SMD
ASFL0707PMXXOD180B120	180	120	NA	425   325   65	SMD
ASFL0707PMXXOD200	200	120	NA	425   325   65	SMD
ASFL0707PMXXOD200B180	200	120	NA	425   325   65	SMD



## SMD FLOODSTORM VI



### LED SMD FLOOD LIGHT

Arraystorm SMD FLOODSTORM-6, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium with or without lens 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0708PMXXOD250	250	120	NA	412   412   65	SMD
ASFL0708PMXXOD250B90	250	120	NA	412   412   65	SMD
ASFL0708PMXXOD300	300	120	NA	412   412   65	SMD
ASFL0708PMXXOD300B90	300	120	NA	412   412   65	SMD





## INDUSTRIAL SABER



### LED INDUSTRIAL BATTEN LIGHT

Arraystorm INDUSTRIAL SABER, Hi-efficiency LED Batten Luminaire, Body made of extruded aluminium housing & polycarbonate opal finish. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASBT9003SFXXIN020	20	140	NA	592   56   74	SMD
ASBT9003SFXXIN040	40	140	NA	1192   56   74	SMD

## MAXIM TRUNKING INDUSTRIAL SABER



### LED INDUSTRIAL BATTEN TRUNKING

Arraystorm MAXIM TRUNKING System, Body made of extruded aluminium housing, can accommodate upto 9 wires for single phase / 3 phase / Emergency as well as dimming wires.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASTK9003SF- for 1 Mtr Trunk	NA	NA	NA	1196   58   52	SMD
ASTK9003SFCOVER- for 1 Mtr Trunk	NA	NA	NA	NA	SMD
ASBT9003SFXXIN020WC	20	140	NA	592   56   67	SMD
ASBT9003SFXXIN040WC	40	140	NA	1192   56   67	SMD

\*\*Price of the trunk is with 4 wire loop in loop out. For 6 to 9 wire system price available on request.

## INDUSTRIAL SABER



### LED INDUSTRIAL BATTEN LIGHT

Arraystorm Industrial SABER LED Batten, Body made of co-extruded polycarbonate. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASBT9005SFXXIN020	20	140	NA	600   53   74	SMD
ASBT9005SFXXIN040	40	140	NA	1200   53   74	SMD

## WELL GLASS



### LED BAYSTAR LIGHT

Arraystorm BAYSTAR -1, Hi-efficiency LED Wellglass Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASWG0911SFXX030	30	140	NA	175   218	SMD
ASWG0911SFXX060	60	140	NA	225   240	SMD

## BULK HEAD



### LED BAYSTAR LIGHT

Arraystorm BAYSTAR -2, Hi-efficiency LED Wellglass Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASBK0921SFXX009	9	120	NA	212   82	SMD





## OPTIMUS I



### LED STREET LIGHT

Arraystorm OPTIMUS LED Streetlight, Body made of die-cast Aluminium and lens. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASST0801PFXOD020	20	120	NA	300   56   74	SMD
ASST0802PFXOD024	24	120	NA	1192   56   74	SMD
ASST0803PFXOD030	30	120	NA	1192   56   74	SMD
ASST0804PFXOD036	36	120	NA	1192   56   74	SMD
ASST0805PFXOD050	50	120	NA	1192   56   74	SMD
ASST0806PFXOD060	60	120	NA	592   56   74	SMD
ASST0807PFXOD080	80	120	NA	600   53   74	SMD
ASST0808PFXOD100	80	120	NA	1200   53   74	SMD
ASST0809PFXOD120	120	120	NA	592   56   74	SMD

## OPTIMUS V



### LED STREET LIGHT

Arraystorm OPTIMUS LED Streetlight, Body made of Aluminium and Toughned glass cover and high precision lens. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASST0811PFXOD080	80	145 65	NA	600   53   74	SMD
ASST0812PFXOD120	120	145 65	NA	1200   53   74	SMD
ASST0813PFXOD160	160	145 65	NA	600   53   74	SMD
ASST0814PFXOD200	200	145 65	NA	600   53   74	SMD





# CLEANROOM LIGHTING RANGE

A customisable lighting solution for CLEANROOM environment helps to optimize conditions in Pharmaceuticals and Healthcare workplaces. These fixtures have been designed for protection against contamination, pollution, by organic & inorganic particles and maintain a complete dust free area.



## Application areas

Pharmaceutical Industry  
Chemical/Biological Lab  
Healthcare Premises



## EPIC BOCR (1X1)



### RECESSED BOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Bottom Opening Clean Room (BOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2050SFXXIN016	16	120	300 300	320   320   75	SMD
ASCR2050SFXXIN016SS	16	120	300 300	320   320   75	SMD

## EPIC BOCR (2X2)



### RECESSED BOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Bottom Opening Clean Room (BOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2051SFXXIN032	32	120	600 600	630   630   75	SMD
ASCR2051SFXXIN042	42	120	600 600	630   630   75	SMD
ASCR2051SFXXIN064	64	120	600 600	630   630   75	SMD
ASCR2051SFXXIN084	84	120	600 600	630   630   75	SMD
ASCR2051SFXXIN032SS	32	120	600 600	630   630   75	SMD
ASCR2051SFXXIN042SS	42	120	600 600	630   630   75	SMD
ASCR2051SFXXIN064SS	64	120	600 600	630   630   75	SMD
ASCR2051SFXXIN084SS	84	120	600 600	630   630   75	SMD

## EPIC BOCR (1X2)



### RECESSED BOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Bottom Opening Clean Room (BOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2052SFXXIN018	18	120	600 300	630   330   75	SMD
ASCR2052SFXXIN022	22	120	600 300	630   330   75	SMD
ASCR2052SFXXIN018SS	18	120	600 300	630   330   75	SMD
ASCR2052SFXXIN022SS	22	120	600 300	630   330   75	SMD

## EPIC BOCR (1X4)



### RECESSED BOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Bottom Opening Clean Room (BOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2053SFXXIN032	32	120	1200 300	1230   330   75	SMD
ASCR2051SFXXIN042	42	120	1200 300	1230   330   75	SMD
ASCR2051SFXXIN064	64	120	1200 300	1230   330   75	SMD
ASCR2051SFXXIN084	84	120	1200 300	1230   330   75	SMD
ASCR2053SFXXIN032SS	32	120	1200 300	1230   330   75	SMD
ASCR2051SFXXIN042SS	42	120	1200 300	1230   330   75	SMD
ASCR2051SFXXIN064SS	64	120	1200 300	1230   330   75	SMD
ASCR2051SFXXIN084SS	84	120	1200 300	1230   330   75	SMD



## EPIC BOCR (2X4)



### RECESSED BOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Bottom Opening Clean Room (BOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2054SFXXIN064	64	120	1200 600	1230   630   75	SMD
ASCR2054SFXXIN084	84	120	1200 600	1230   630   75	SMD
ASCR2054SFXXIN100	100	120	1200 600	1230   630   75	SMD
ASCR2054SFXXIN120	120	120	1200 600	1230   630   75	SMD
ASCR2054SFXXIN140	140	120	1200 600	1230   630   75	SMD
ASCR2054SFXXIN064SS	64	120	1200 600	1230   630   75	SMD
ASCR2054SFXXIN084SS	84	120	1200 600	1230   630   75	SMD
ASCR2054SFXXIN100SS	100	120	1200 600	1230   630   75	SMD
ASCR2054SFXXIN120SS	120	120	1200 600	1230   630   75	SMD
ASCR2054SFXXIN140SS	140	120	1200 600	1230   630   75	SMD

## EPIC BOCR (2X2) SCREWLESS



### RECESSED BOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Bottom Opening Clean Room (BOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2051SFXXIN032	32	120	600 600	630   630   75	SMD
ASCR2051SFXXIN042	42	120	600 600	630   630   75	SMD
ASCR2051SFXXIN064	64	120	600 600	630   630   75	SMD
ASCR2051SFXXIN084	84	120	600 600	630   630   75	SMD

## EPIC TOCR (1X1)



### RECESSED TOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Top Opening Clean Room (TOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2060SFXXIN016	16	120	300 300	340   340   136	SMD
ASCR2060SFXXIN016SS	16	120	300 300	340   340   136	SMD

## EPIC TOCR (2X2)



### RECESSED TOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Top Opening Clean Room (TOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2061SFXXIN032	32	120	600 600	640   640   136	SMD
ASCR2061SFXXIN042	42	120	600 600	640   640   136	SMD
ASCR2061SFXXIN064	64	120	600 600	640   640   136	SMD
ASCR2061SFXXIN084	84	120	600 600	640   640   136	SMD
ASCR2061SFXXIN032SS	32	120	600 600	640   640   136	SMD
ASCR2061SFXXIN042SS	42	120	600 600	640   640   136	SMD
ASCR2061SFXXIN064SS	64	120	600 600	640   640   136	SMD
ASCR2061SFXXIN084SS	84	120	600 600	640   640   136	SMD



## EPIC TOCR (1X2)



### RECESSED TOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Top Opening Clean Room (TOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2062SFXXIN018	18	120	600 300	640   340   136	SMD
ASCR2062SFXXIN022	22	120	600 300	640   340   136	SMD
ASCR2062SFXXIN018SS	18	120	600 300	640   340   136	SMD
ASCR2062SFXXIN022SS	22	120	600 300	640   340   136	SMD

## EPIC TOCR (1X4)



### RECESSED TOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Top Opening Clean Room (TOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2063SFXXIN032	32	120	1200 300	1240   340   136	SMD
ASCR2063SFXXIN042	42	120	1200 300	1240   340   136	SMD
ASCR2063SFXXIN064	64	120	1200 300	1240   340   136	SMD
ASCR2063SFXXIN084	84	120	1200 300	1240   340   136	SMD
ASCR2063SFXXIN032SS	32	120	1200 300	1240   340   136	SMD
ASCR2063SFXXIN042SS	42	120	1200 300	1240   340   136	SMD
ASCR2063SFXXIN064SS	64	120	1200 300	1240   340   136	SMD
ASCR2063SFXXIN084SS	84	120	1200 300	1240   340   136	SMD

## EPIC TOCR (2X4)



### RECESSED TOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Top Opening Clean Room (TOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2064SFXXIN064	64	120	1200 600	1240   640   136	SMD
ASCR2064SFXXIN084	84	120	1200 600	1240   640   136	SMD
ASCR2064SFXXIN100	100	120	1200 600	1240   640   136	SMD
ASCR2064SFXXIN120	120	120	1200 600	1240   640   136	SMD
ASCR2064SFXXIN140	140	120	1200 600	1240   640   136	SMD
ASCR2064SFXXIN064SS	64	120	1200 600	1240   640   136	SMD
ASCR2064SFXXIN084SS	84	120	1200 600	1240   640   136	SMD
ASCR2064SFXXIN100SS	100	120	1200 600	1240   640   136	SMD
ASCR2064SFXXIN120SS	120	120	1200 600	1240   640   136	SMD
ASCR2064SFXXIN140SS	140	120	1200 600	1240   640   136	SMD

## EPIC BUND COVER



### BUND COVER FOR RECESSED TOCR CLEANROOM

Arraystorm EPIC TOCR Bund cover, Body made of powder coated CRCA.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2070SF1X1BUNDCOVER	NA	120	300 300	350   350   85	NA
ASCR2071SF2X2BUNDCOVER	NA	120	600 600	650   650   85	NA
ASCR2072SF1X2BUNDCOVER	NA	120	600 300	650   350   85	NA
ASCR2073SF1X4BUNDCOVER	NA	120	1200 300	1250   350   85	NA
ASCR2074SF2X4BUNDCOVER	NA	120	1200 600	1250   650   85	NA



## FLAME PROOF CLEANROOM (1X1)



### RECESSED FLAME PROOF CLEANROOM LED GRID LIGHT

Arraystorm EPIC Flame Proof Recessed High Efficiency Cleanroom LED Gridlight, Body made of die cast Aluminium and Frame made of powder coated CRCA and high precision glass lens.230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2080FLXXIN030	30	120	275 275	312   312   140	SMD
ASCR2080FLXXIN040	40	120	275 275	312   312   140	SMD
ASCR2080FLXXIN050	50	120	275 275	312   312   140	SMD

## FLAME PROOF CLEANROOM (1X1)



### RECESSED FLAME PROOF CLEANROOM LED GRID LIGHT

Arraystorm EPIC Flame Proof Recessed High Efficiency Cleanroom LED Gridlight, Body made of die cast Aluminium and Frame made of Stainless Steel and high precision glass lens.230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2080FLXXIN030SS	30	120	275 275	312   312   140	SMD
ASCR2080FLXXIN040SS	40	120	275 275	312   312   140	SMD
ASCR2080FLXXIN050SS	50	120	275 275	312   312   140	SMD

## FLAME PROOF CLEANROOM (2X2)



### RECESSED FLAME PROOF CLEANROOM LED GRID LIGHT

Arraystorm EPIC Flame Proof Recessed High Efficiency Cleanroom LED Gridlight, Body made of die cast Aluminium and Frame made of powder coated CRCA and high precision glass lens.230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2081FLXXIN030	30	120	572 572	612   612   140	SMD
ASCR2081FLXXIN040	40	120	572 572	612   612   140	SMD
ASCR2081FLXXIN050	50	120	572 572	612   612   140	SMD
ASCR2081FLXXIN060	60	120	572 572	612   612   140	SMD
ASCR2081FLXXIN080	80	120	572 572	612   612   140	SMD
ASCR2081FLXXIN100	100	120	572 572	612   612   140	SMD

## FLAME PROOF CLEANROOM (2X2)



### RECESSED FLAME PROOF CLEANROOM LED GRID LIGHT

Arraystorm EPIC Flame Proof Recessed High Efficiency Cleanroom LED Gridlight, Body made of die cast Aluminium and Frame made of Stainless Steel and high precision glass lens.230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2081FLXXIN030SS	60	120	572 572	612   612   140	SMD
ASCR2081FLXXIN040SS	80	120	572 572	612   612   140	SMD
ASCR2081FLXXIN050SS	50	120	572 572	612   612   140	SMD
ASCR2081FLXXIN060SS	60	120	572 572	612   612   140	SMD
ASCR2081FLXXIN080SS	80	120	572 572	612   612   140	SMD
ASCR2081FLXXIN100SS	100	120	572 572	612   612   140	SMD



## FLAME PROOF CLEANROOM (1X2)



**RECESSED LED DOWN LIGHT**  
**RECESSED FLAME PROOF CLEANROOM LED GRID LIGHT**  
 Arraystorm EPIC Flame Proof Recessed High Efficiency Cleanroom LED Gridlight, Body made of die cast Aluminium and Frame made of powder coated CRCA and high precision glass lens.230 V with standard driver, CRI>80,  
 CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2082FLXXIN030	30	120	275 572	312   612   140	SMD
ASCR2082FLXXIN040	40	120	275 572	312   612   140	SMD
ASCR2082FLXXIN050	50	120	275 572	312   612   140	SMD
ASCR2082FLXXIN060	60	120	275 572	312   612   140	SMD
ASCR2082FLXXIN080	80	120	275 572	312   612   140	SMD
ASCR2082FLXXIN100	100	120	275 572	312   612   140	SMD

## FLAME PROOF CLEANROOM (1X2)



**RECESSED FLAME PROOF CLEANROOM LED GRID LIGHT**  
 Arraystorm EPIC Flame Proof Recessed High Efficiency Cleanroom LED Gridlight, Body made of die cast Aluminium and Frame made of Stainless Steel and high precision glass lens.230 V with standard driver, CRI>80,  
 CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCR2082FLXXIN030SS	30	120	275 572	312   612   140	SMD
ASCR2082FLXXIN040SS	40	120	275 572	312   612   140	SMD
ASCR2082FLXXIN050SS	50	120	275 572	312   612   140	SMD
ASCR2082FLXXIN060SS	60	120	275 572	312   612   140	SMD
ASCR2082FLXXIN080SS	80	120	275 572	312   612   140	SMD
ASCR2082FLXXIN100SS	100	120	275 572	312   612   140	SMD

## BAYSTAR II



**FLAME PROOF LED WELLGLASS LIGHT**  
 Arraystorm BAYSTAR , Hi-efficiency LED Flame proof Wellglass Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80,  
 CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) dia	DIMENSION (mm) dia   H	LED
ASWG0916FLXXIN030	30	120	NA	195   155	SMD
ASWG0916FLXXIN040	40	120	NA	195   155	SMD
ASWG0916FLXXIN050	50	120	NA	195   155	SMD
ASWG0918FLXXIN060	60	120	NA	410   155	SMD
ASWG0918FLXXIN080	80	120	NA	410   155	SMD
ASWG0918FLXXIN100	100	120	NA	410   155	SMD

## FLAME PROOF OPTIMUS



**FLAME PROOF LED STREET LIGHT**  
 Arraystorm OPTIMUS 2 Flame Proof LED Streetlight, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80,  
 CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) dia	DIMENSION (mm) dia   H	LED
ASST0851FLXXOD030	30	120	NA	455   240   155	SMD
ASST0851FLXXOD040	40	120	NA	455   240   155	SMD
ASST0851FLXXOD050	50	120	NA	455   240   155	SMD
ASST0852FLXXOD060	60	120	NA	455   240   155	SMD
ASST0852FLXXOD080	80	120	NA	455   240   155	SMD
ASST0852FLXXOD100	100	120	NA	455   240   155	SMD



## FLAME PROOF FLOODSTORM I



### FLAME PROOF LED FLOOD LIGHT

Arraystorm BAYSTAR , Hi-efficiency LED Flame proof Wellglass Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0751FLXXOD060	60	120	NA	450   234   132	SMD
ASFL0751FLXXOD080	80	120	NA	450   234   132	SMD
ASFL0751FLXXOD100	100	120	NA	450   234   132	SMD

## FLAME PROOF FLOODSTORM II




### FLAME PROOF LED FLOOD LIGHT

Arraystorm BAYSTAR , Hi-efficiency LED Flame proof Wellglass Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0752FLXXOD120	120	120	NA	664   234   132	SMD
ASFL0752FLXXOD150	150	120	NA	664   234   132	SMD

## FLAME PROOF FLOODSTORM III



### FLAME PROOF LED FLOOD LIGHT

Arraystorm BAYSTAR , Hi-efficiency LED Flame proof Wellglass Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASFL0753FLXXOD160	160	120	NA	450   450   132	SMD
ASFL0753FLXXOD200	200	120	NA	450   450   132	SMD

## BAYSTAR II



### FLAME PROOF LED REACTOR LIGHT

Arraystorm BAYSTAR 2 , Hi-efficiency LED Flame proof Reactor Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASRL0921FLXXIN010	10	120	NA	150   276	SMD
ASRL0921FLXXIN020	20	120	NA	150   276	SMD
ASRL0921FLXXIN040	40	120	NA	150   276	SMD

## BAYSTORM II



### FLAME PROOF LED LINEAR LIGHT

Arraystorm BAYSTAR , Hi-efficiency LED Flame proof LinearLight, Body made of extruded aluminium housing. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	LED
ASCL127105FLXXOD030	30	120	NA	127   105	SMD
ASCL127105FLXXOD050	50	120	NA	127   105	SMD



ARRAYSTORM'S PHOTOMETRIC LAB FROM DENMARK



# MANUFACTURING & DESIGN

The state-of-the-art factory in Bangalore features fully equipped machines for 'pick and place' of LEDs along with machines for 'made-to-measure' profile productions. All employees receive extensive training to guarantee best craftsmanship standards. Ongoing investment in people, infrastructure and production capabilities keep our product ranges at the forefront of the market's requirements.

Arraystorm Design Center stretches its wings to disciplines such as optical, mechanical, software, electronics, and electrical engineering. Relying on in-house engineering expertise, our products are created with a deep understanding of customer and industry requirements, enabling us to bring functional, quality products from concept to life, in record time.

ARRAYSTORM'S ALUMINIUM CUTTING MACHINE FROM ITALY

# TESTING & QUALITY

The team at Arraystorm follows the strictest quality parameters, to ensure products and services are designed and produced to exceed customer requirements. Arraystorm's team of engineers are on a continuous search for new age design with emphasis on energy-efficiency and optimal quality of light. Through extensive in-house testing, advanced product development, and continuous optimization of materials used, Arraystorm is able to provide functional lighting which excels in optimal performance, durability, and efficiency. Product quality and safety testing is done in accordance with international standards by government accredited lighting laboratories such as UL and Intertek.

ARRAYSTORM'S SMT LINE FROM JAPAN



## General conditions of business

### Disclaimer

- Company reserves the right to issue amendments, which may rise due to any errors in the catalogue
- Continuous design changes is a routine practice of RR Kabel. Data provided may change without any prior intimation
- Customers are advised to reconfirm the data or product dimensions before purchase with our local offices
- Products can be withdrawn by the company at any point of time without prior notice

---

Although every effort has been made to ensure accuracy in the compilation of the technical detail in this catalogue, however the current details' specifications of all components needs to be checked with RR Kabel's Arraystorm team before placing of orders as the Specifications , design and the performance data are constantly being upgraded till the issue of next catalogue.

Copyright notice: . Imitation of product images. trade marks , graphics and color scheme of this document is a punishable offence.



Ram Ratna House, Oasis Complex, P. B. Marg, Worli, Mumbai - 400 013.

T: +91 - 22 - 2494 9009 / 2492 4144 • F: +91 - 22 - 2491 2586 • E: mumbai.rrkabel@rrglobal.com

305/A, Windsor Plaza, R. C. Dutt Road, Alkapuri, Vadodara - 390 007.

T: +91 - 265 - 2321 891 / 2 / 3 • F: +91 - 265 - 2321 894 • E: vadodara.rrkabel@rrglobal.com

---

## **R R KABEL LIMITED**

**Regd. Office :** Ram Ratna House, Oasis Complex, P. B. Marg, Worli, Mumbai - 400 013.

**H.O. Arraystorm Lighting Div.:** No.2318, 2nd Floor, Sector 1, 27th Main Road, Opp. NIFT, HSR Layout, Bengaluru - 560102.  
+91 80 2976 5570 / 71, Email : [info@arraystorm.com](mailto:info@arraystorm.com)

**Ahmedabad:** 079 - 4900 0100 , **Bengaluru:** 080-0000 0000, **Bhubaneswar:** 0674 - 2971 231,

**Chennai:** 044 - 2829 2329 / 2429, **Coimbatore:** 0422 - 2910 560, **Guwahati:** 0361 - 2730772,

**Indore:** 0731 - 4009 863, **Jaipur:** 0141 - 2741417, **Jalandhar:** 0181 - 500 3394, **Ernakulam:** 0484 - 2378 782,

**Kolkata:** 033 - 6607 1233 / 2262 8660, **Lucknow:** 0522 - 4113 745 / 46, **Madurai:** 0452 - 4370 340,

**New Delhi:** 011 - 4303 8395 / 2735 5477 / 78, **Pune:** 020 - 2567 7207,

**Raipur:** 0771 - 2971 518, **Rajkot:** 0932 7722 501, **Secunderabad:** 040 - 2780 4098,

**Silvassa:** 0260 - 2641 333, **Surat:** 9376 507 543, **Trichy:** 8939 830 338.

[www.arraystorm.com](http://www.arraystorm.com) • [www.rrglobal.com](http://www.rrglobal.com)